

BEST AVAILABLE COPY



PCT/GB 2004 / 0 0 2 4 9 6



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 800

REC'D 22 JUL 2004

WIPO

PCT

PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

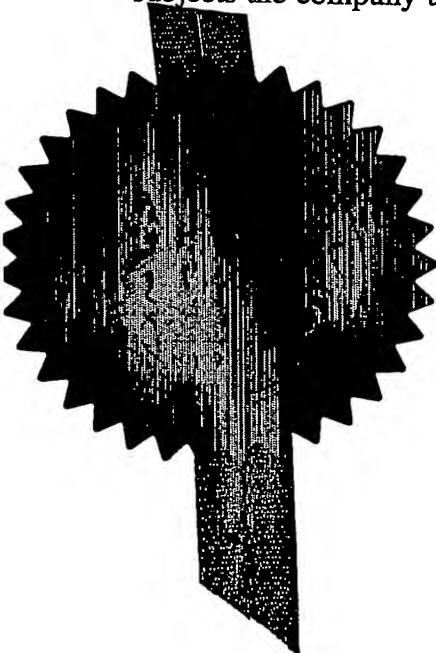

Signed

Dated 9 July 2004



1977003 ERI6117-1 000001
P01/7700 0.00-0314205.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference JVN/9321 GB

2. Patent application number
(The Patent Office will fill in this part)

16 JUN 2003

0314205.6

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

B & W LOUDSPEAKERS LIMITED
Dale Road
Worthing
BN11 2BH
SUSSEX

0800925 0002

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

(formerly of Meadow Road BN11 2RX)
UK

4. Title of the invention Diaphragms for loudspeaker drive units

5. Name of your agent (*if you have one*)

Abel & Imray

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

20 Red Lion Street
London
WC1R 4PQ
United Kingdom

Patents ADP number (*if you know it*)

174001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form	0
Description	18 ✓
Claim(s)	5 ✓
Abstract	- ✓
Drawing(s)	3 + 3 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>)	-
Request for preliminary examination and search (<i>Patents Form 9/77</i>)	1
Request for substantive examination (<i>Patents Form 10/77</i>)	-
Any other documents (<i>please specify</i>)	-

11. I/We request the grant of a patent on the basis of this application.

Signature

Abel & Imray

Date

Abel & Imray 18.06.03

12. Name and daytime telephone number of person to contact in the United Kingdom Victor Nettleton 0207 242 9984

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DUPLICATE

Diaphragms for loudspeaker drive units

This invention relates to diaphragms for loudspeaker drive units.

The construction of the diaphragm for a loudspeaker drive unit involves a number of inter-related and often conflicting criteria; in particular, the criteria of mass, stiffness, cost, and sound transmission through the diaphragm. In any given construction, these criteria must be carefully balanced to make a successful diaphragm; it is not generally possible to change any one of them in a given construction without upsetting the balance between them.

It is desirable to keep the mass of the diaphragm low to achieve good sensitivity but it is difficult to achieve a high degree of stiffness (which is desirable) with a diaphragm of low mass.

Patent Specification DE 10049744 discloses the use of polycrystalline diamond for making a diaphragm of high stiffness and low mass but the cost and the difficulty of fabrication preclude the use of diamond other than for very small diaphragms.

Patent specification WO 00/78091 describes a loudspeaker diaphragm made by winding tensile members about a frame and providing a membrane on the tensile members. A disadvantage of that construction is that the

diaphragm is relatively transparent to sound passing through the diaphragm. It would not, however, be desirable to add significantly to the mass in attempting to reduce the sound transmission through the diaphragm.

5 It has also been proposed to make a loudspeaker diaphragm using a foam material, see, for example, patent specification GB 2,059,717. Foam has the advantage of being light and resistant to the transmission of sound but has the disadvantage of not having great stiffness.
10 It would not, however, be desirable to add significantly to the mass in attempting to stiffen the diaphragm.

 It is an object of the invention to provide a diaphragm for a loudspeaker drive unit which enables a good balance between the criteria of mass, stiffness,
15 cost and sound transmission through the diaphragm to be achieved.

 The present invention provides a diaphragm for a loudspeaker drive unit, the diaphragm comprising a block of material having a first, sound-radiating front face
20 and a second, rear face, characterized in that the block is stiffened by being bound about over the first and second faces by a multiplicity of turns of one or more elongate members of flexible material stiffened by a stiffening composition.

Such an arrangement is able to provide a diaphragm of improved performance without the need for a high degree of tension in the binding and without the need for a skin on the outside of the binding. High tension in the binding may be used if desired and an outer skin may be provided if desired but it is preferred to use neither high tension nor an outer skin. The flexible nature of the material of the one or more elongate members makes it easy to wind about the block of material and the stiffening composition imparts stiffness to the wound material and to the diaphragm as a whole.

Such a construction is able to provide good isolation of the delayed resonances which can arise when the portion of the rear radiation of a loudspeaker diaphragm that is not absorbed by the speaker cabinet re-emerges through the diaphragm. That problem arises in conventional constructions because, typically, in a non-axisymmetric loudspeaker enclosure, the internal sound field is diffuse and sound impinging on the rear of a conventional thin diaphragm is subject only to modest attenuation above the intrinsically low natural modes and, at certain frequencies, the transmission loss may be lower still without adequate damping.

The use of a block of the material as a diaphragm improves stiffness whilst avoiding the complexity of a

composite "sandwich" construction involving thin elements. A "sandwich" construction is problematic because the edges are difficult to deal with and, by its nature, the construction tends to be wasteful of materials.

Advantageously, the front face is convex. Such a construction avoids limitations of a simple conventional cone diaphragm, namely, that the concave side of a cone can have a deleterious effect on both on the acoustic output of the cone itself as a result of cavity and horn type effects, and also on the output of neighbouring diaphragms as a result of cavity absorption and strong reflection and re-radiation cancellation effects.

Advantageously, the second face is convex.

When the construction has two convex faces and is symmetrical, or at least approximately so, it overcomes the problem that a simple cone diaphragm is inherently asymmetric at a normal to its central axis. This asymmetry of a conventional construction results in nonlinear distortion owing to the difference in radiation resistance of the cone moving forward to the cone moving backwards and the difference in axial stiffness of the cone (loaded either by forcing acceleration or acoustic impedance) when the rim is being forced forwards or backwards.

The convex conical surfaces of the core may be straight sided or may be radiused or may follow a hyperbolic or exponential profile.

The convex conical surfaces may be non-circular.

5 The convex conical surfaces of the foam core may be different in height and profile.

Preferably, the or each face is frusto-conical.

The block may be circular in front elevation.

10 Instead, the block may be elliptical in front elevation.

The block may be made of a rigid plastics foam material. The term "rigid plastics foam material" is used to distinguish from soft plastics foam material having effectively no structural strength.

15 Ideally, the foam should have as low a density as possible. In practice, the foam may have a density of more than 20 grams per litre.

The foam may have a density between 28 and 35grams per litre.

20 Advantageously, the foam is a polymethyl methacrylamide foam.

Instead, the foam may be expanded polystyrene.

In an illustrated embodiment of the invention, the foam diaphragm core is of a very low density, largely
25 non-porous foamed material with a relatively high

stiffness/mass ratio and high internal damping.

Polymethyl methacrylamide foam with a density of 30 grams/litre is a suitable material, or, for a reduced cost, a moulded expanded Polystyrene foam form of density
5 around 30 grams/litre will suffice.

Advantageously, the block contains one or more internal voids. By this means, the mass of the diaphragm can be reduced.

Preferably, the one or more elongate members are in
10 tension.

Preferably, the tension is a relatively low tension just sufficient to maintain the members taut at all times in use. Such a degree of tension is sufficient to allow proper bonding when it is desired that the one or more
15 elongate members be bonded to the block of material.

Advantageously, the or each elongate member is constituted by a bundle of monofilaments.

Preferably, the monofilaments are plastics material monofilaments.

20 The monofilament material may be paraphenylene polybenzobisoxazole.

The one or more flexible elongate members may comprise glass fibre monofilaments.

The body of material may be bound about by a single
25 flexible elongate member.

Preferably, the diaphragm is a diaphragm for sub-bass or bass or bass-mid audio frequencies. Such diaphragms are relatively large and not difficult to bound about with turns of the one or more flexible elongate members.

The body of material may be bound about by between 100 and 500 turns.

The body of material may be bound about by between 200 and 400 turns.

10 A protective rim may be provided at the periphery of the block between the one or more elongate members and the material of the block. Such a rim is particularly useful when the block of material is made of polystyrene and liable to be too easily penetrated at its periphery
15 by the one or more elongate members bound about it.

The one or more elongate members may be adhesively secured directly to the material of said block. The stiffening composition may serve both to stiffen the one or more elongate members and to secure them to the
20 material of the block.

Preferably, the said first face of the block of the material and said one or more flexible members are arranged to act directly on the ambient air to radiate sound. In such a construction, there is no additional
25 skin to add unwanted mass to the diaphragm.

Advantageously, the diaphragm is bonded to a central tubular member for carrying the voice coil of the loudspeaker drive unit.

The stiffening composition may comprise a resin
5 composition.

The resin composition may be selected from the group consisting of a styrene resin, an epoxy resin, a cellulose solvent based acrylic resin, a polyurethane resin, a cyanocrylate resin, and a thermosetting phenolic
10 based resin.

The invention also provides a loudspeaker drive unit including a diaphragm as defined above.

The invention also provides a method of making a diaphragm for a loudspeaker drive unit, comprising
15 binding a block of material with a multiplicity of turns of one or more elongate members of flexible material and using a stiffening composition to stiffen the one or more elongate members.

Diaphragms for a loudspeaker drive unit constructed
20 in accordance with the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows a diagrammatic cross-section through a loudspeaker drive unit including a diaphragm embodying the invention;

5 Figure 2 corresponds to Figure 1 but shows the provision of internal voids and a protective rim; and

Figure 3 is a perspective view of a diaphragm embodying the invention.

10

Referring to the accompanying drawings, Figure 1 shows a loudspeaker drive unit 1 embodying the invention. The drive unit comprises a chassis member 2 carrying a diaphragm suspension or surround 4. The surround, in
15 turn, carries the diaphragm 6 of the loudspeaker drive unit. A central tube 8 is provided within the diaphragm 6. The loudspeaker drive unit 1 has a magnet assembly 10 and a suspension or "spider" 12 for the inner end of the tube 8. A voice coil is provided at the inner end of the
20 tube 8 within the magnet assembly 10 but is omitted from the drawings for ease of illustration.

The loudspeaker drive unit 1 is for the reproduction of sub-bass or bass or mid-bass audio frequencies.

The diaphragm 6 is a shallow convex, symmetrical,
25 lightweight diaphragm whose inherent rigidity and

internal losses serve well to attenuate delayed resonances from inside a loudspeaker enclosure. The tube 8 is a thin walled tube and can be either the loudspeaker voice coil former sleeve itself or can comprise an extension to a voice coil former sleeve.

Because of the presence of the tube 8 within the diaphragm 6, the diaphragm may be thought of as having a very low relative density centre and may be thought of as described by the volume occupied by two conical surfaces placed edge to edge punctured by an axial bore hole whose diameter corresponds to the outer diameter of the tubular former. The tube 8 is, as shown, bonded into the diaphragm, 6 so as to extend slightly beyond it.

In a practical example, the tube 8 was of a low density, high longitudinal stiffness material, in particular, tape-wound carbon fibre in an epoxy resin composite with density 1.6 grams/cc and Young's modulus 300 GPa.

The ratio of the outer diameter of the diaphragm 6 to the diameter of the tube 8 is preferably 3:1. Most practical constructions will lie between a ratio of 2:1 and a ratio of 6:1.

The ratio of the outer diameter of the diaphragm 6 to the overall thickness of the diaphragm is preferably

4:1. Most practical constructions will lie between a ratio of 3:1 and 10:1.

The diaphragm 6 comprises a block of material having a first, sound-radiating front face 20 and a second, rear face 22. The block is stiffened by being bound about over the first and second faces 20, 22 by a multiplicity of turns of an elongate member (not shown in Figures 1 and 2 for clarity of illustration) of flexible material and stiffened by a stiffening composition.

A single continuous fibre or tape is wound in contact with and at a tangent to the slightly projecting tube 8, around the outside edge of the diaphragm 6 and back to the diametrically and vertically opposed tangential face of the tube whilst a synchronised periodic rotation of the diaphragm about its central axis is performed. This operation is repeated for as many revolutions of the core as is required for an adequate covering of its surface. The method of winding is shown in Figure 4 of patent specification WO 00/78091. About 300 turns are put on the diaphragm 6.

Stiffening is achieved by the addition of an adhesive resin to the fibre as it is wound over the diaphragm 6 and tube 8, or by application of adhesive resin to the diaphragm and tube before the fibre is wound, or by application of adhesive resin to the wound

assembly of all three components by, for example, spraying. Such an adhesive resin can simply take the form of an automotive paint, for example, of an aesthetically pleasing colour. The following are all
5 suitable compositions for use: a two part styrene resin, a part epoxy resin, a cellulose solvent based acrylic lacquer, a two part isocyanate reactable lacquer, a part epoxy reactable lacquer, a polyurethane lacquer, a cyanoacrylate, and a thermosetting phenolic based resin.

10 The front face 20 is convex and the second face 22 is also convex and the construction is symmetrical. The faces 20 and 22 are, as shown, frusto-conical. The diaphragm 6 is circular in front elevation.

The block of material constituting the diaphragm 6
15 is of a rigid plastics foam material. The foam is of a very low density, largely non-porous foamed material with a relatively high stiffness/mass ratio and high internal damping. Polymethyl methacrylamide foam with a density of 30 grams/litre is a suitable material, or, for reduced
20 cost, a moulded expanded polystyrene foam form of density around 30 grams/litre can be used.

In one practical example of the invention, the foam material used was Rhoacell 31LS which has a density of 32 kg/m³ and a Young's modulus of 35 MPa. Rhoacell is
25 available in different grades of different density and

corresponding stiffness. For example, Rhoacell 51LS
(density = 52 kg/m³, YM = 68MPa) and Rhoacell 71LS
(density = 75 kg/m³, YM = 90MPa). The diaphragm was
machined from a solid block, Rhoacell being easy to
5 machine although expensive.

The flexible elongate member is in tension but the
tension is a relatively low tension just sufficient to
maintain the member taut at all times in use. The
elongate member is constituted by a bundle of
10 monofilaments of plastics material monofilaments.
The elongate member is wound under sufficient tension to
ensure that it remains taught over the whole structure,
in this way, all the available stiffness of the fibre and
the performance of the structure as a whole is
15 substantially maximised. It is possible, however, to use
a tension of a significantly higher to obtain a degree of
pre-stressing in the same manner of a spoked wheel.
The elongate member is in contact with the foam core
and/or the tubular former at all times.

20 In one practical example, the elongate member was a
low density yet very high stiffness material with high
internal damping, in particular, monofilamentary
paraphenylene polybenzobisoxazole (PBO) Zylon HM tow with
a density of 1.56 grams/cc and a Young's modulus of 270
25 GPa. The lack of wastage in the construction and the

relatively small amount of material required almost removes the need for any cheaper option but glass fibre of density 2.7 g/cc and modulus 71GPa can produce acceptable results in some applications.

5 Preferably, the fibres of the elongate member are not only stiffened but are bonded to each other and the diaphragm 6 and the tube 8.

In one practical example, the ratio of masses of the three components tube 8, diaphragm 6 and elongate member
10 was 2:16:1. Most practical constructions will lie within the ranges of the tube 8 being twice as heavy or half as light, or the elongate member being four times as heavy or half as light, both with respect to the diaphragm 6.

In one practical example, the diaphragm 6 had a
15 300mm outer diameter and the tube 8 a 100mm diameter. The elongate member had a diameter of about 0.07mm and about 300 turns were applied.

The illustrated construction has the advantage that binding the diaphragm with the elongate member is able to
20 shift the first break-up frequency of the diaphragm from 1500Hz to 2500Hz.

A modified embodiment of the invention is shown in Figure 2 in which identical reference numerals are used for identical parts. Only the differences from the

embodiment of Figure 1 will be described. In Figure 2, the diaphragm 6 includes an annular internal void 30 to reduce its mass. A circumferential protective rim 32 in the form of a ring of filament-wound carbon fibre surrounds the periphery of the block of material constituting the diaphragm 6 and underlies the binding by the elongate member. The protective rim and internal void may be used independently as well as in conjunction with each other as illustrated.

Figure 3 shows a practical example of a diaphragm embodying the invention. The diaphragm of Figure 3 has an outer, metal mounting flange attached to the periphery of the surround 4 and a central dust cap 42, for example, of woven carbon fibre is provided over the mouth of the tube 8. The elongate member bound about the diaphragm 6 is clearly to be seen as reference 36.

Instead of the dust cap shown in Figure 3, it is possible to provide a cylindrical plug of the foam material within the interior of the tube 8.

The illustrated embodiments of the invention match the excellent axial mode performance of existing simple cone designs within similar overall dimensions, whilst addressing many of their limitations at a potentially modest cost involving only a simple construction technique and little requirement for pre-processing of

materials. The very small wastage in production and efficient use of materials allows greater use of more advanced components, in particular, the use of advanced, high modulus fibres.

5 Alternative materials which can be used for the diaphragm 6 include Klegecell, Divinycell and Corecell, all of which are cheaper than Rhoacell but more difficult to machine.

10 Polystyrene is a very cheap alternative which can be injected moulded to form the desired shape for the diaphragm.

15 The diaphragm can, in fact, be made of virtually any suitable lightweight material, for example, aluminium honeycomb, aramid honeycomb, metallic or ceramic foams, aerogels, syntactics, polymer moulded honeycombs or core structures, dimpled sheets, corrugated cardboard, glass microsphere composites, endgrain or laminated balsa wood.

20 If desired, a thin membrane can be used to seal the block of material and a gas, other than air can be incorporated within the sealed block to improve the isolation from the inside to the outside of the enclosure when the diaphragm is in use. Instead, by some form of pre-stressing of the bound diaphragm a vacuum can be

sustained within it to provide the best acoustic isolation.

The elongate member can take the form of a monofilament, yarn tow, wire, tape or ribbon and be of
5 virtually any material. Cotton, silk, liquid crystal polymer, boron, shape memory metal, aramids and tungsten filaments can all be used.

The block of material used in the diaphragm may be a single block of integral construction or may be made form
10 two or more smaller blocks joined together into a single block.

The invention is also applicable to a dome type speaker in which the tube carrying the voice coil is connected to the outside of the diaphragm.

15 In a construction using a central voice coil tube, it is possible to dispense with a tube that penetrates the diaphragm and instead replace it by one which is bonded directly to the bottom of the inside edge of the diaphragm's central hole. The extra reinforcement to the
20 strength of the diaphragm core that the illustrated construction imparts can be replaced or even exceeded by changing the winding technique to toroidal winding. Thus, a single continuous fibre can be wound down through the axial bore and over the diaphragm continuously until
25 the whole structure is covered.

In the illustrated embodiments, the elongate member is wound so that it is a tangent to the tube. This results in a distribution over the surface with greater fibre density, in terms of unit area, closer to the tube than towards the outer edge of the diaphragm. By altering the angle the fibre makes with the tube a more uniform fibre distribution as regards to structural stiffness is possible.

Other suitable materials for the one or more elongate members are carbon fibre and Kevlar®.

C L A I M S:

1. A diaphragm for a loudspeaker drive unit, the
diaphragm comprising a block of material having a first,
5 sound-radiating front face and a second, rear face,
characterized in that the block is stiffened by being
bound about over the first and second faces by a
multiplicity of turns of one or more elongate members of
flexible material stiffened by a stiffening composition.

10

2. A diaphragm as claimed in claim 1, wherein the front
face is convex.

15

3. A diaphragm as claimed in claim 1 or claim 2, wherein
the second face is convex.

4. A diaphragm as claimed in claim 2 or claim 3, wherein
the or each face is frusto-conical.

20

5. A diaphragm as claimed in any preceding claim,
wherein the block is circular in front elevation.

6. A diaphragm as claimed in any of claims 1 to 4,
wherein the block is elliptical in front elevation.

25

7. A diaphragm as claimed in any preceding claim,
wherein the block is made of a rigid plastics foam
material.

5 8. A diaphragm as claimed in claim 7, wherein the foam
has a density of more than 20 grams per litre

9. A diaphragm as claimed in claim 8, wherein the foam
has a density between 28 and 35grams per litre.

10

10. A diaphragm as claimed in any one of claims 7 to 9,
wherein the foam is a polymethyl methacrylamide foam.

11. A diaphragm as claimed in any one of claims 7 to 9,
15 wherein the foam comprises expanded polystyrene.

12. A diaphragm as claimed in any preceding claim,
wherein the block contains one or more internal voids.

20 13. A diaphragm as claimed in any preceding claim,
wherein the one or more elongate members are in tension.

14. A diaphragm as claimed in claim 12, wherein the
tension is a relatively low tension just sufficient to
25 maintain the members taut at all times in use.

15. A diaphragm as claimed in any preceding claim,
wherein the or each elongate member is constituted by a
bundle of monofilaments.

5

16. A diaphragm as claimed in claim 15, wherein the
monofilaments are plastics material monofilaments.

17. A diaphragm as claimed in claimed in claim 16,
10 wherein the monofilament material is paraphenylene
polybenzobisoxazole.

18. A diaphragm as claimed in claim 15, wherein the one
or more flexible elongate members comprise glass fibre
15 monofilaments.

19. A diaphragm as claimed in any preceding claim,
wherein the body of material is bound about by a single
flexible elongate member.

20

20. A diaphragm as claimed in any preceding claim,
wherein the diaphragm is a diaphragm for sub-bass or bass
or bass-midaudio frequencies.

21. A diaphragm as claimed in claim 20, wherein the body of material is bound about by between 100 and 500 turns.

22. A diaphragm as claimed in claim 21, wherein the body
5 of material is bound about by between 200 and 400 turns.

23. A diaphragm as claimed in any preceding claim,
wherein a protective rim is provided at the periphery of
the block between the one or more elongate members and
10 the material of the block.

24. A diaphragm as claimed in any preceding claim,
wherein the one or more elongate members are adhesively
secured directly to the material of said block.

15

25. A diaphragm as claimed in any preceding claim,
wherein the said first face of the block of the material
and said one or more flexible members are arranged to act
directly on the ambient air to radiate sound.

20

26. A diaphragm as claimed in any preceding claim,
wherein the diaphragm is bonded to a central tubular
member for carrying the voice coil of the loudspeaker
drive unit.

25

27. A diaphragm as claimed in any preceding claim, wherein the stiffening composition comprises a resin composition.

5 28. A diaphragm as claimed in claim 27, wherein the resin composition is selected from the group consisting of a styrene resin, an epoxy resin, a cellulose solvent based acrylic resin, a polyurethane resin, a cyanocrylate resin, and a thermosetting phenolic based resin.

10

29. A diaphragm for a loudspeaker drive unit substantially as herein described with reference to, and as illustrated by, Figure 1 of the accompanying drawings.

15 30. A diaphragm for a loudspeaker drive unit substantially as herein described with reference to, and as illustrated by, Figure 2 of the accompanying drawings.

31. A diaphragm for a loudspeaker drive unit
20 substantially as herein described with reference to, and as illustrated by, Figure 3 of the accompanying drawings.

32. A loudspeaker drive unit including a diaphragm as claimed in any preceding claim.

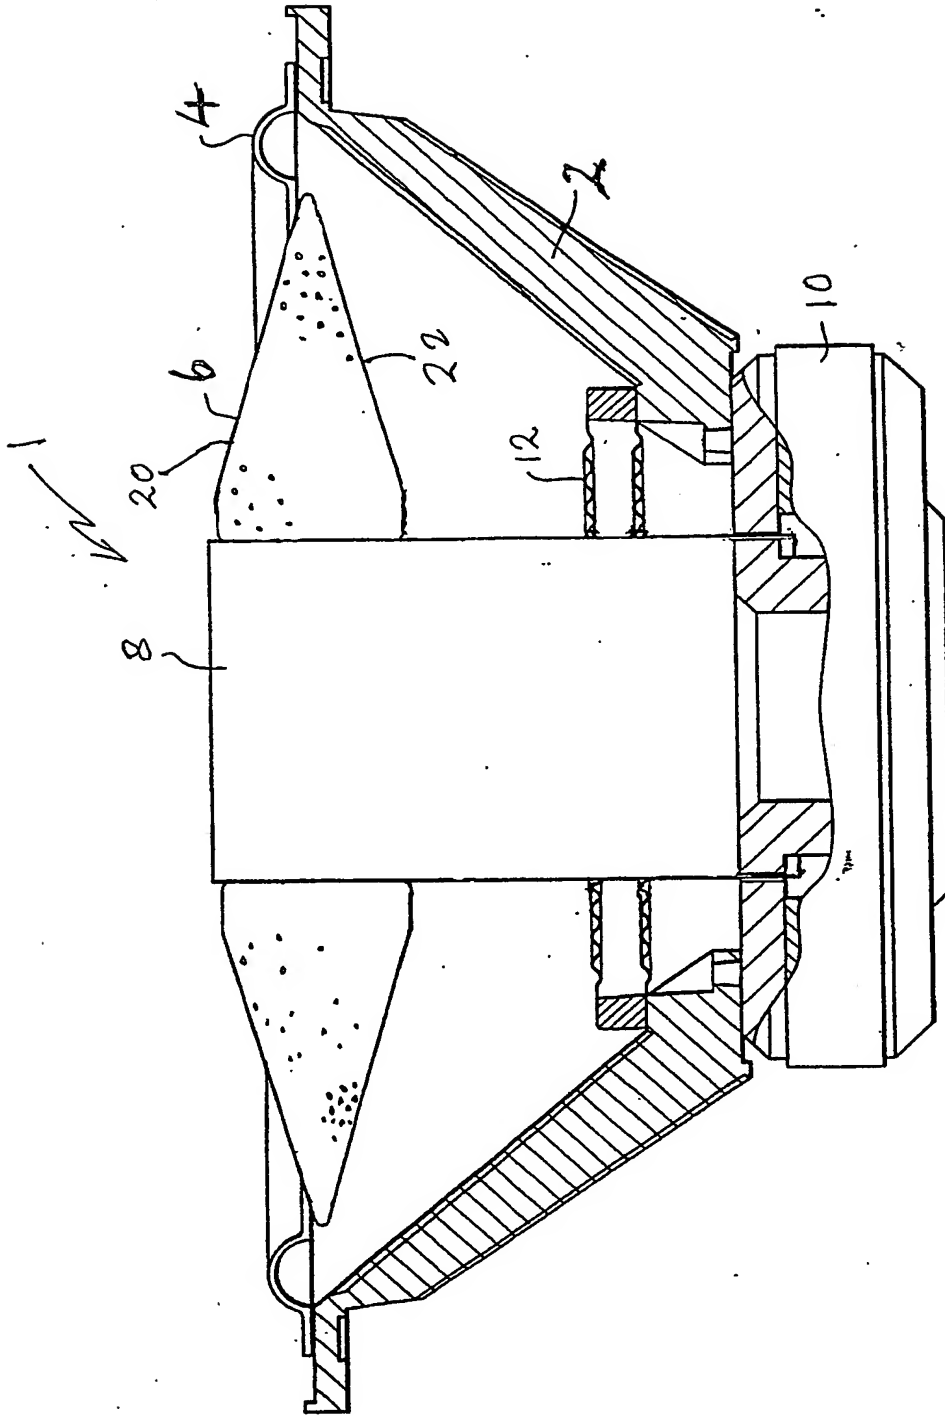


Fig. 1

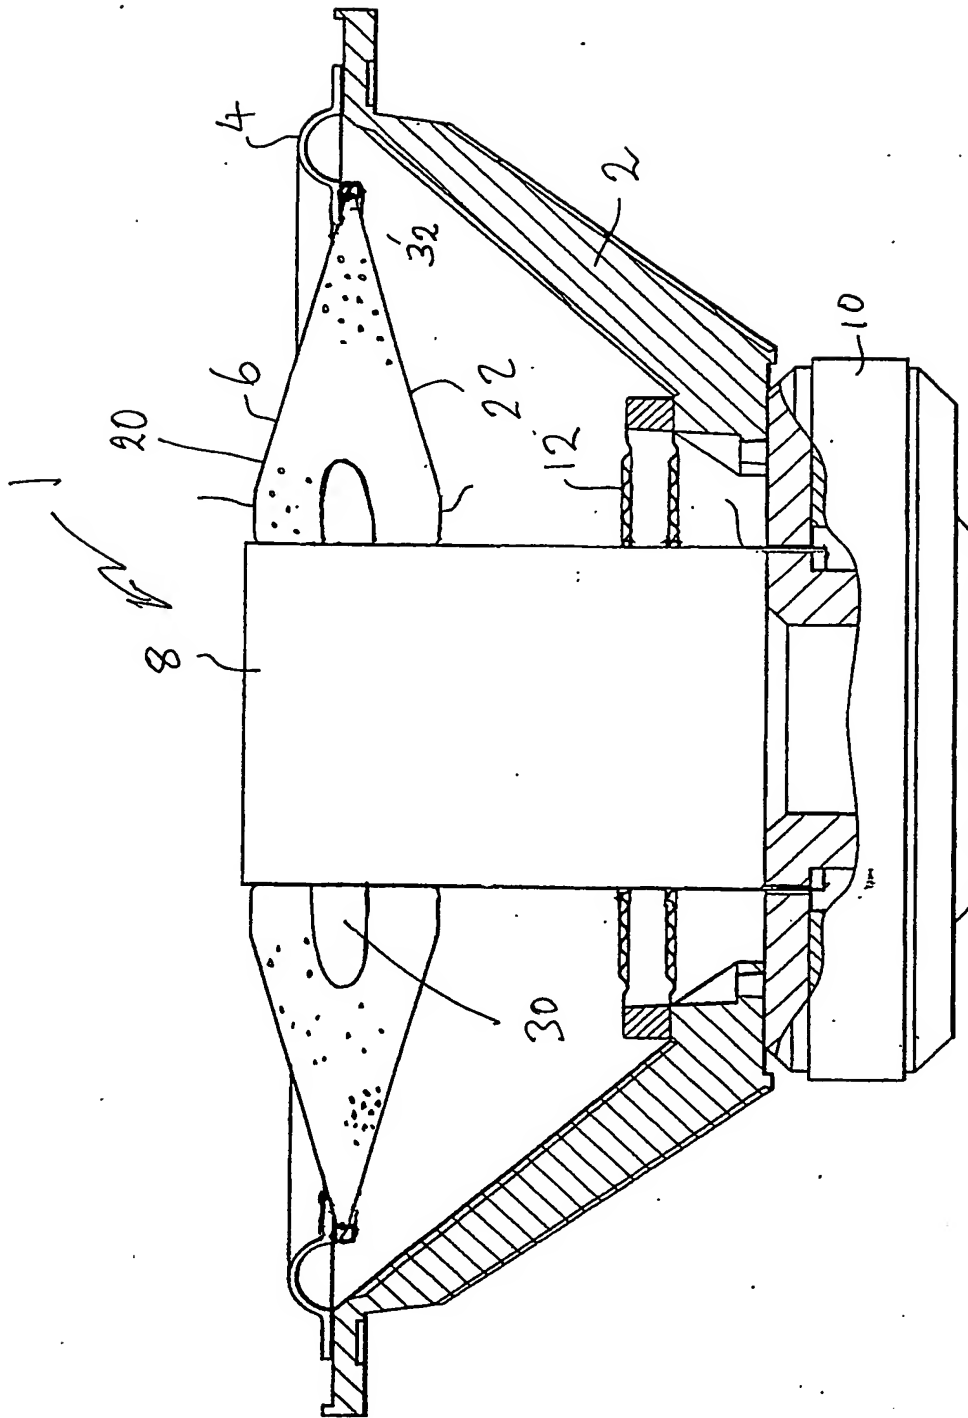


Fig. 2

3/3


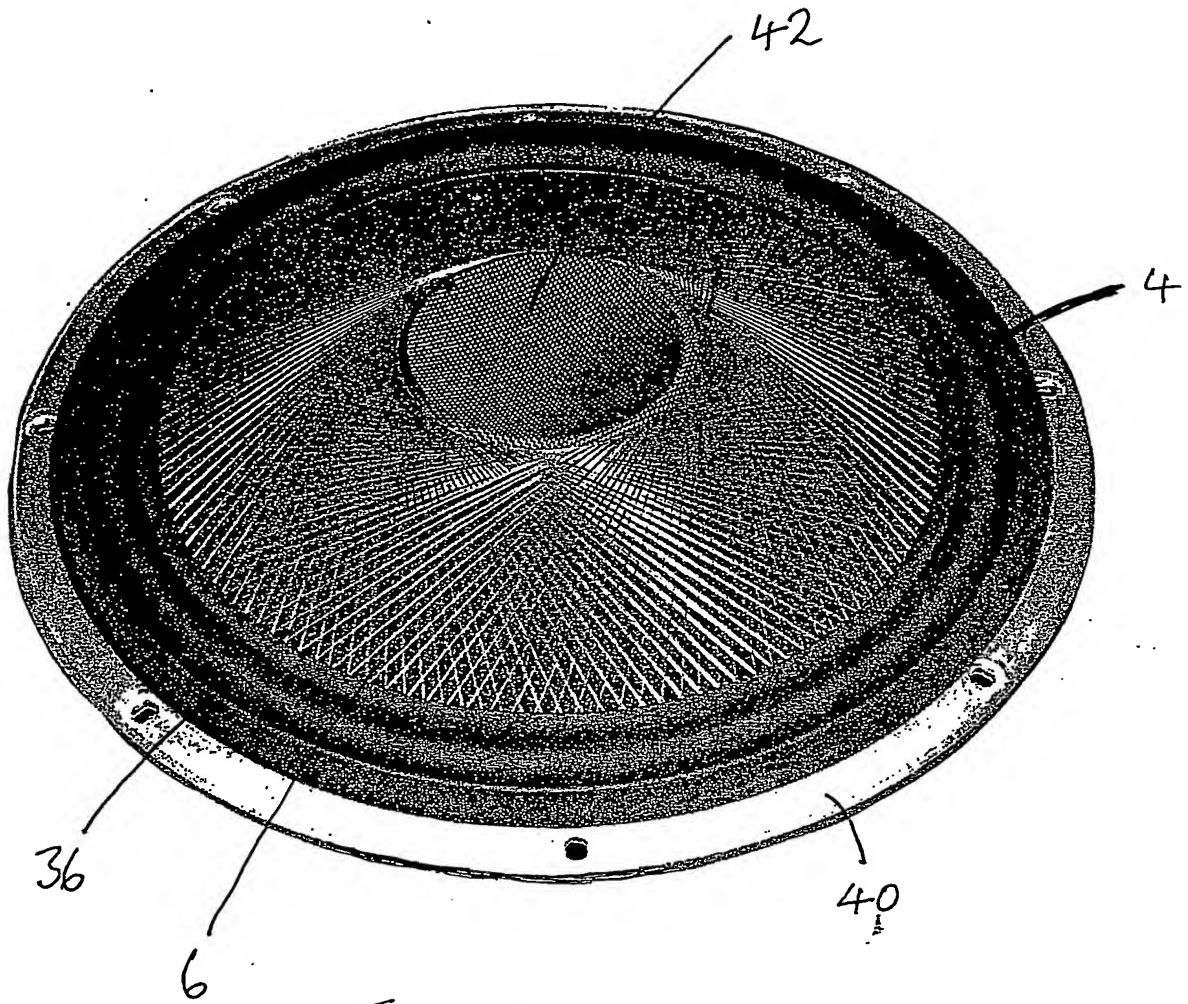


Fig. 3

PCT/GB2004/002406



THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.